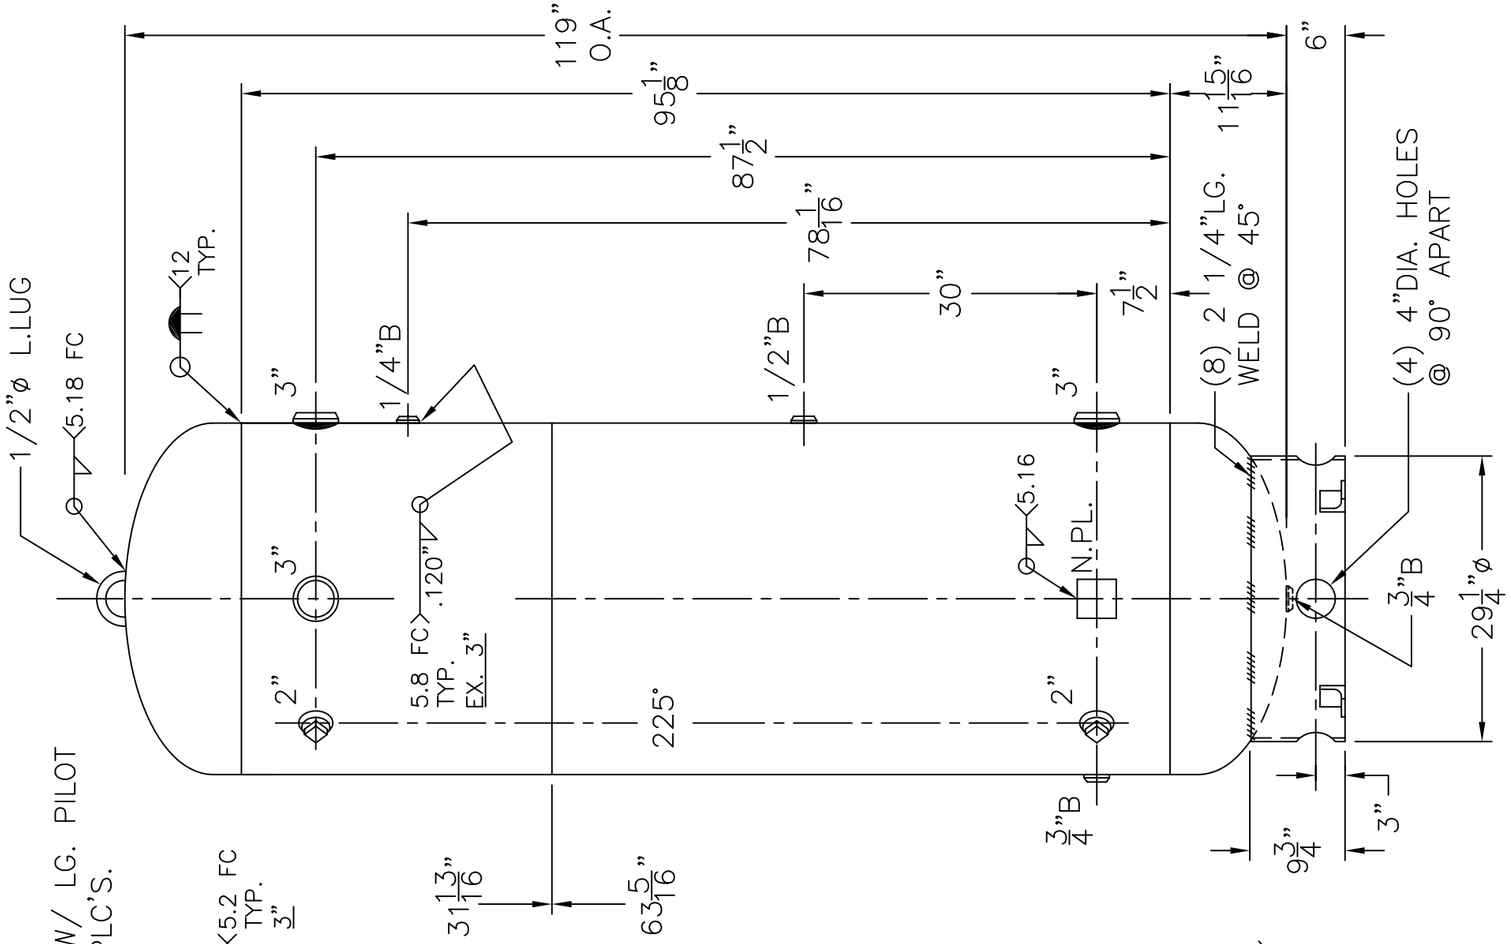

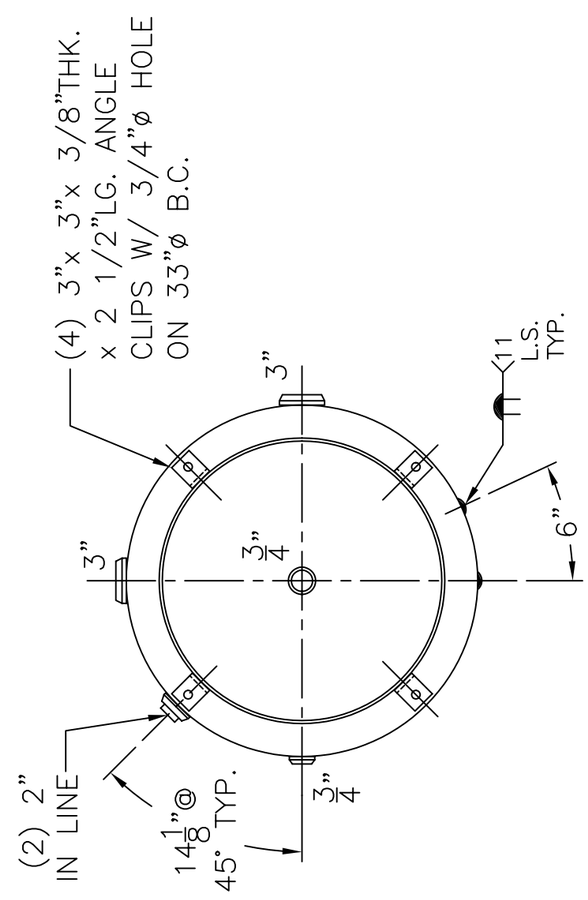

3) NO IMPACT TESTING UG-20 (F)
2) DRAIN FOR HORIZONTAL MOUNT ADDED AFTER SERIAL #423,136
NOTE: 1) HYDRO @ 217 PSIG. MIN.

SHELL / HEADS	.182" SA-455 2:1 S.E.	36-VM-500-R	REV. 12-18-06
	JOGGLE		DATE: 10-10-83
		FOR: HANSON STANDARD	
		VERT. AIR TANK	
	.164" SA-414-G	B.C. CRN #K5761.1	
		INSIDE: UNPAINTED	
M.A.W.P. 165 PSIG. @ 400 °F			
M.D.M.T. -20 °F @ 165 PSIG.		OUTSIDE: PRIME	
ASME. SECTION VIII DIV. 1, 2004 ADD 2006		CAD "B" SIZE UNDER "STD"-SERIES	
X-RAY: RT-4 SPOT L.S. ONLY		BY: E.S.	SCALE: 3/4"=12"
GALLONS: 500	WT. 758 LBS.	ROY E. HANSON JR. MFG.	
SERIAL NO.		1600 E. WASHINGTON BLVD.	
N.B.		LOS ANGELES, CA 90021	