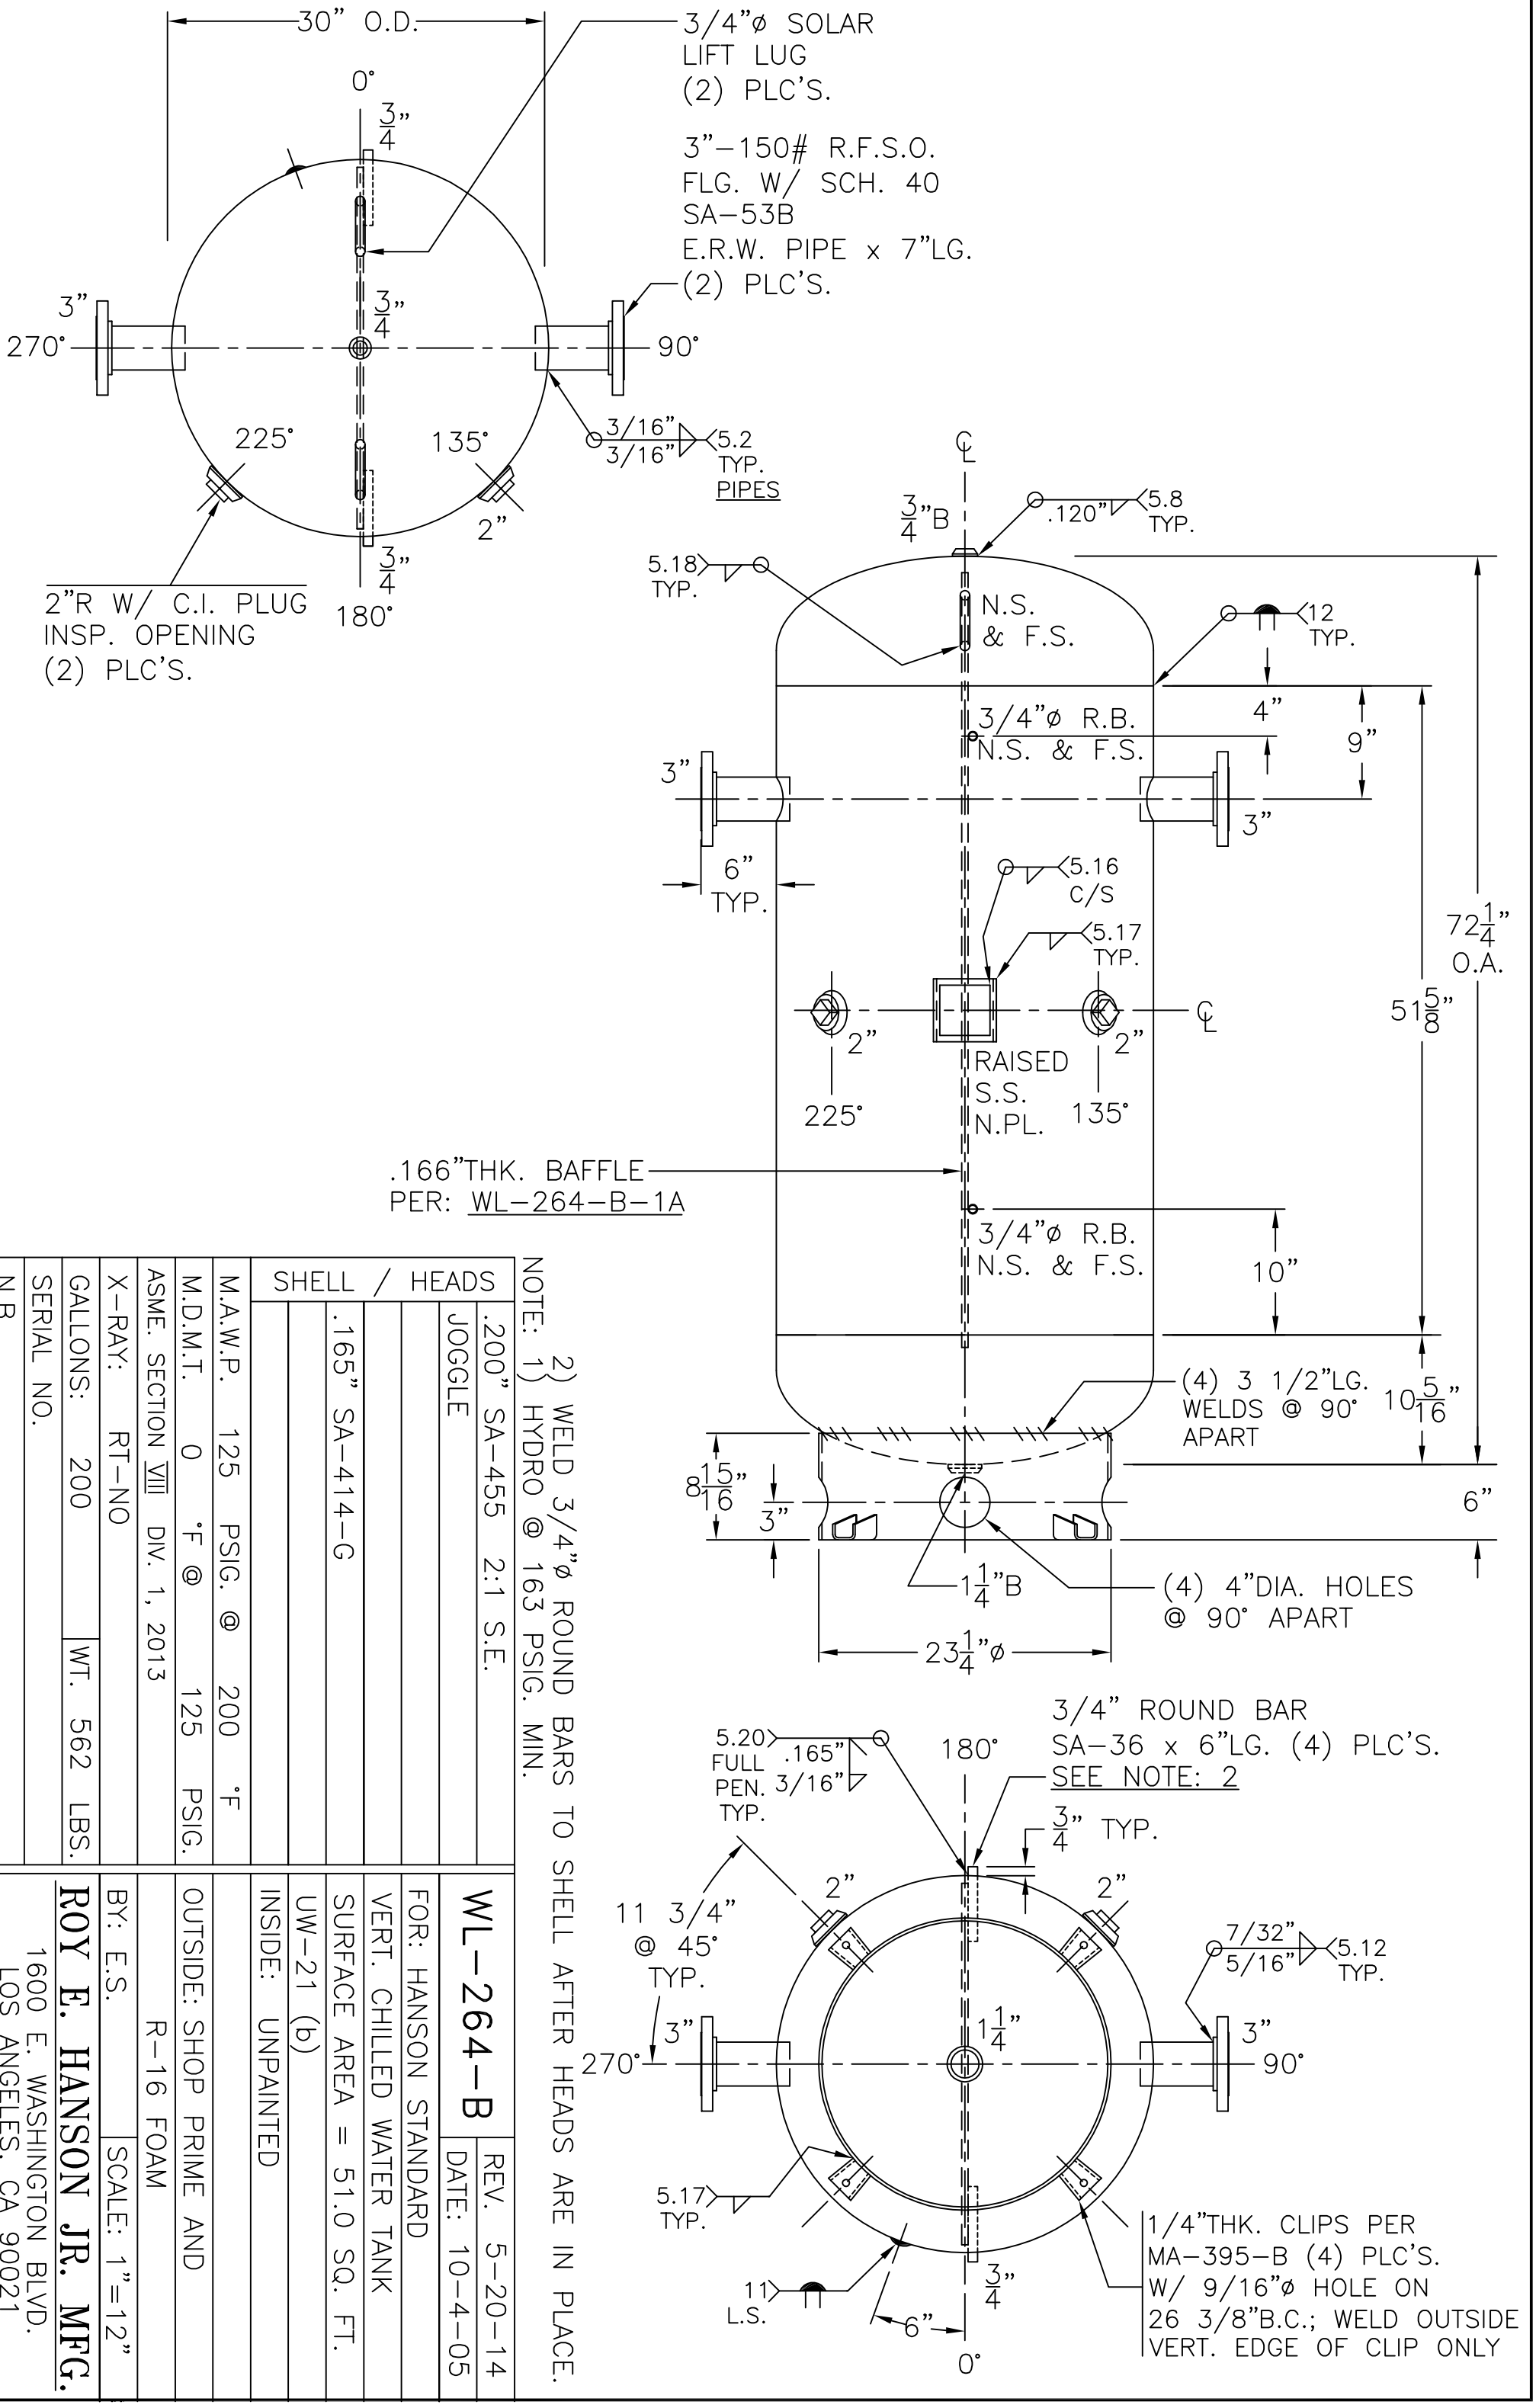

NOTE: 1) HYDRO @ 163 PSIG. MIN.
2) WELD 3/4"ø ROUND BARS TO SHELL AFTER HEADS ARE IN PLACE.

SHELL / HEADS	.200" SA–455 2:1 S.E.
	JOGGLE
	.165" SA–414–G
M.A.W.P. 125 PSIG. @ 200 °F	
M.D.M.T. 0 °F @ 125 PSIG.	
ASME. SECTION VIII DIV. 1, 2013	
X–RAY: RT–NO	
GALLONS: 200 WT. 562 LBS.	
SERIAL NO.	
N.B.	

WL–264–B	REV. 5–20–14
	DATE: 10–4–05
FOR: HANSON STANDARD	
VERT. CHILLED WATER TANK	
SURFACE AREA = 51.0 SQ. FT.	
UW–21 (b)	
INSIDE: UNPAINTED	
OUTSIDE: SHOP PRIME AND R–16 FOAM	
BY: E.S.	SCALE: 1"=12"

ROY E. HANSON JR. MFG.
1600 E. WASHINGTON BLVD.
LOS ANGELES, CA 90021