


VIEW W/O SUPPORTS

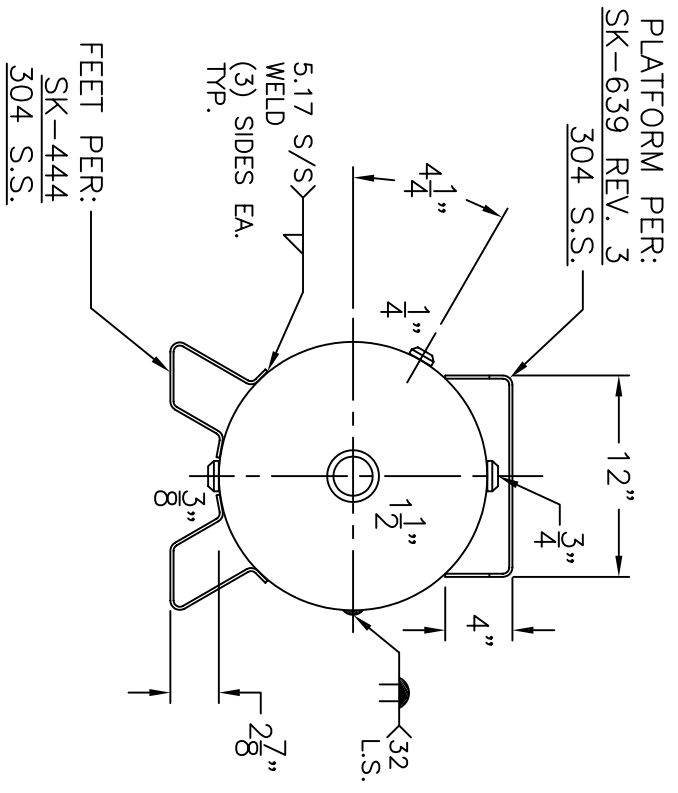

- NOTE: 1) HYDRO @ 357 PSIG. MIN.
 2) ALL FNPT'S SA-182-304 S.S.
 3) ALL 304 S/S CONSTRUCTION.
 4) UHA-51 (e)(2) NO IMPACT TESTING.

SHELL / HEADS		.135" SA-240-304 2:1 S.E.		HC-30-FP		REV. 9-16-09	
JOGGLE - .129" OFFSET				304 S.S.		DATE: 2-5-08	
.187" SA-240-304				FOR: HANSON STANDARD			
				HORIZ. AIR TANK			
				INSIDE: UNPAINTED			
				OUTSIDE: BEAD BLAST			
M.A.W.P.	250 PSIG. @	400 °F					
M.D.M.T.	-155 °F @	250 PSIG.					
ASME SECTION VIII DIV. 1, 2007 ADD. 2008							
X-RAY:	RT-NO						
GALLONS:	30	WT.	153	LBS.			
SERIAL NO.							
N.B.							
				BY: E.S.	SCALE: 1"=12"		
				ROY E. HANSON JR. MFG.			
				1600 E. WASHINGTON BLVD.			
				LOS ANGELES, CA 90021			

PLATFORM PER:
 SK-639 REV. 3
 304 S.S.