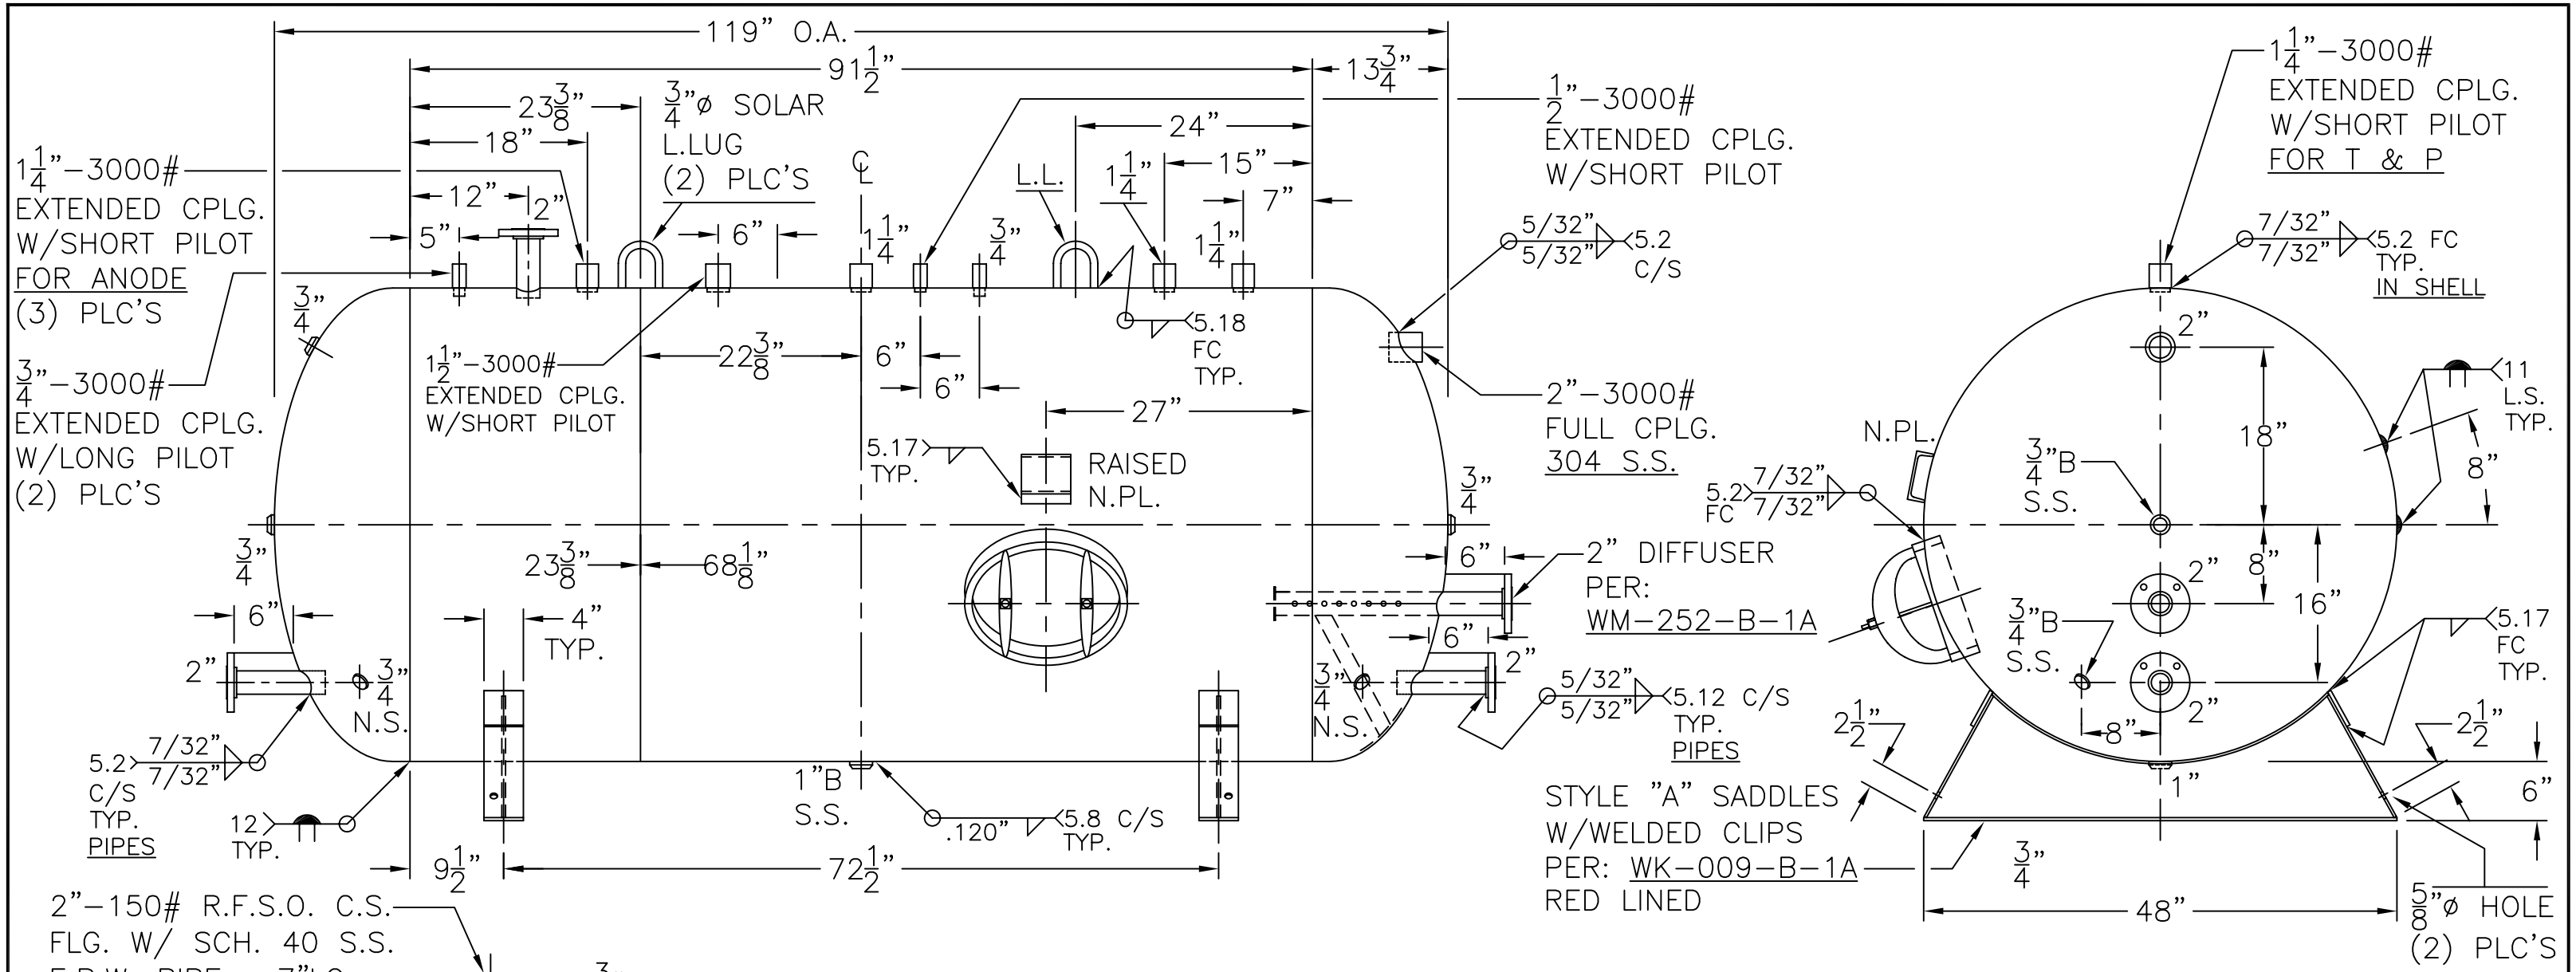

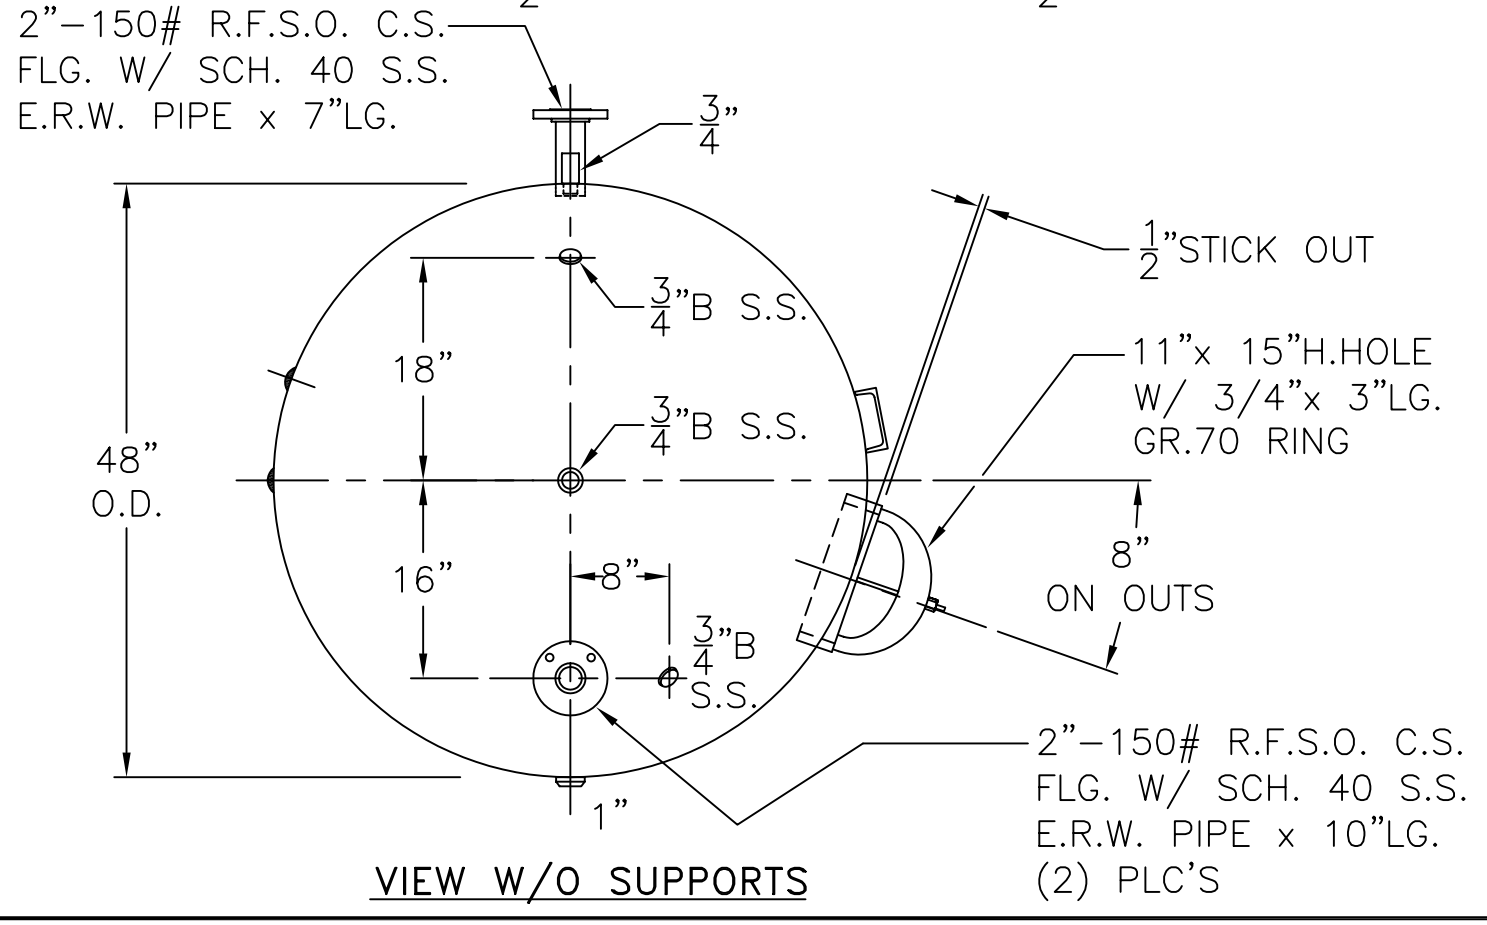

VIEW W/O SUPPORTS

3) ALL PIPES SA–312–304 S.S. E.R.W.
2) SHIP LOOSE W/ (3) 1 5/16"x 42"LG. FLEX. MAG. ANODES
NOTE: 1) HYDRO @ 188 PSIG. MIN. TO 197 PSIG. MAX.

SHELL / HEADS	.245" SA–455 2:1 S.E.	WN–252–B	REV. 6–24–11
	JOGGLE – .249 OFFSET		DATE: 6–7–11
	WELD REPAIR ON FLANGE	FOR: –	
		HORIZ. HOT WATER TANK	
	.200" SA–455	SURFACE AREA = 133.8 SQ. FT.	
		INSIDE: GLASS LINED	
M.A.W.P. 125 PSIG. @ 210 °F		OUTSIDE: S. BLAST, INORGANIC	
		ZINC PRIME	
ASME SECTION Ⅳ 2010 ADD. 2010		"STONERIDGE"	
X–RAY: RT–NO / H.L.W.		BY: J.G./C.J.	SCALE: 3/4"=12"
GALLONS: 850	WT. 1620 LBS.	ROY E. HANSON JR. MFG.	
SERIAL NO.		1600 E. WASHINGTON BLVD.	
N.B.		LOS ANGELES, CA 90021	