


(3) 2 1/2" x 2 1/2" x 3/16" THK. x 20 1/16" LG. ANGLE LEGS

(3) 4" x 4" x 1/4" THK. PAD W/ 7/8"  $\phi$  HOLE FOR 5/8"  $\phi$  x 8" LG. BOLTS GRADE 5 OR BETTER 6" EMBEDMENT

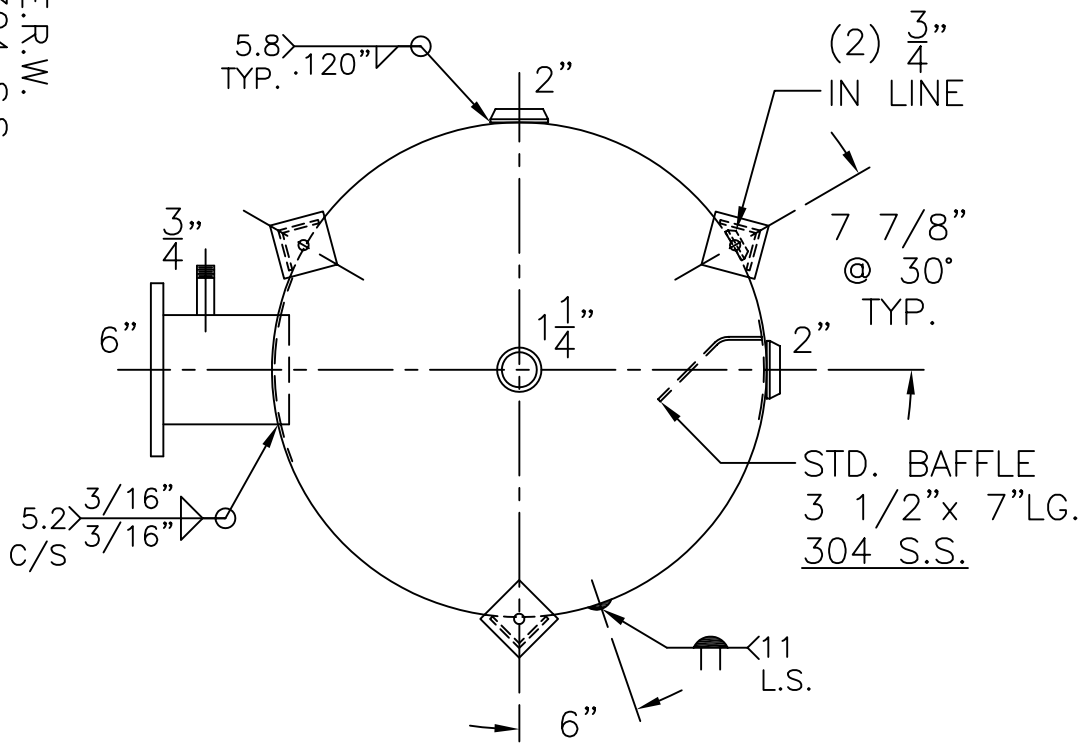

NOTE: 1) SHIP LOOSE W/ (1) 1 5/16" x 36" LG. FLEX. MAG. ANODE.

2) HYDRO @ 225 PSIG. MIN. TO 235 PSIG. MAX.

3) 1" - 3000# F.C. ON TOP - 304 S.S.

4) ALL PIPES SA-312-304 E.R.W.

SHELL / HEADS		.140" SA-414-G 2:1 S.E.
JOGGLE - .149" OFFSET		
M.A.W.P. 150 PSIG. @ 210 °F		
ASME SECTION IV 2007 ADD 2009		
X-RAY: RT-NO / H.L.W.		
GALLONS: 170	WT. 427 LBS.	
SERIAL NO.		
N.B.		
FOR: -		WN-098-B
VERT. HOT WATER TANK		REV. DATE: 11-23-10
SURFACE AREA = 44.2 SQ. FT.		
INSIDE: GLASS LINED		
OUTSIDE: S. BLAST & PRIME		
LEG-ZONE 4-15 KM.		
BY: E.S. / C.J. SCALE: 1" = 12"		
<b>ROY E. HANSON JR. MFG.</b>		
1600 E. WASHINGTON BLVD.		
LOS ANGELES, CA 90021		