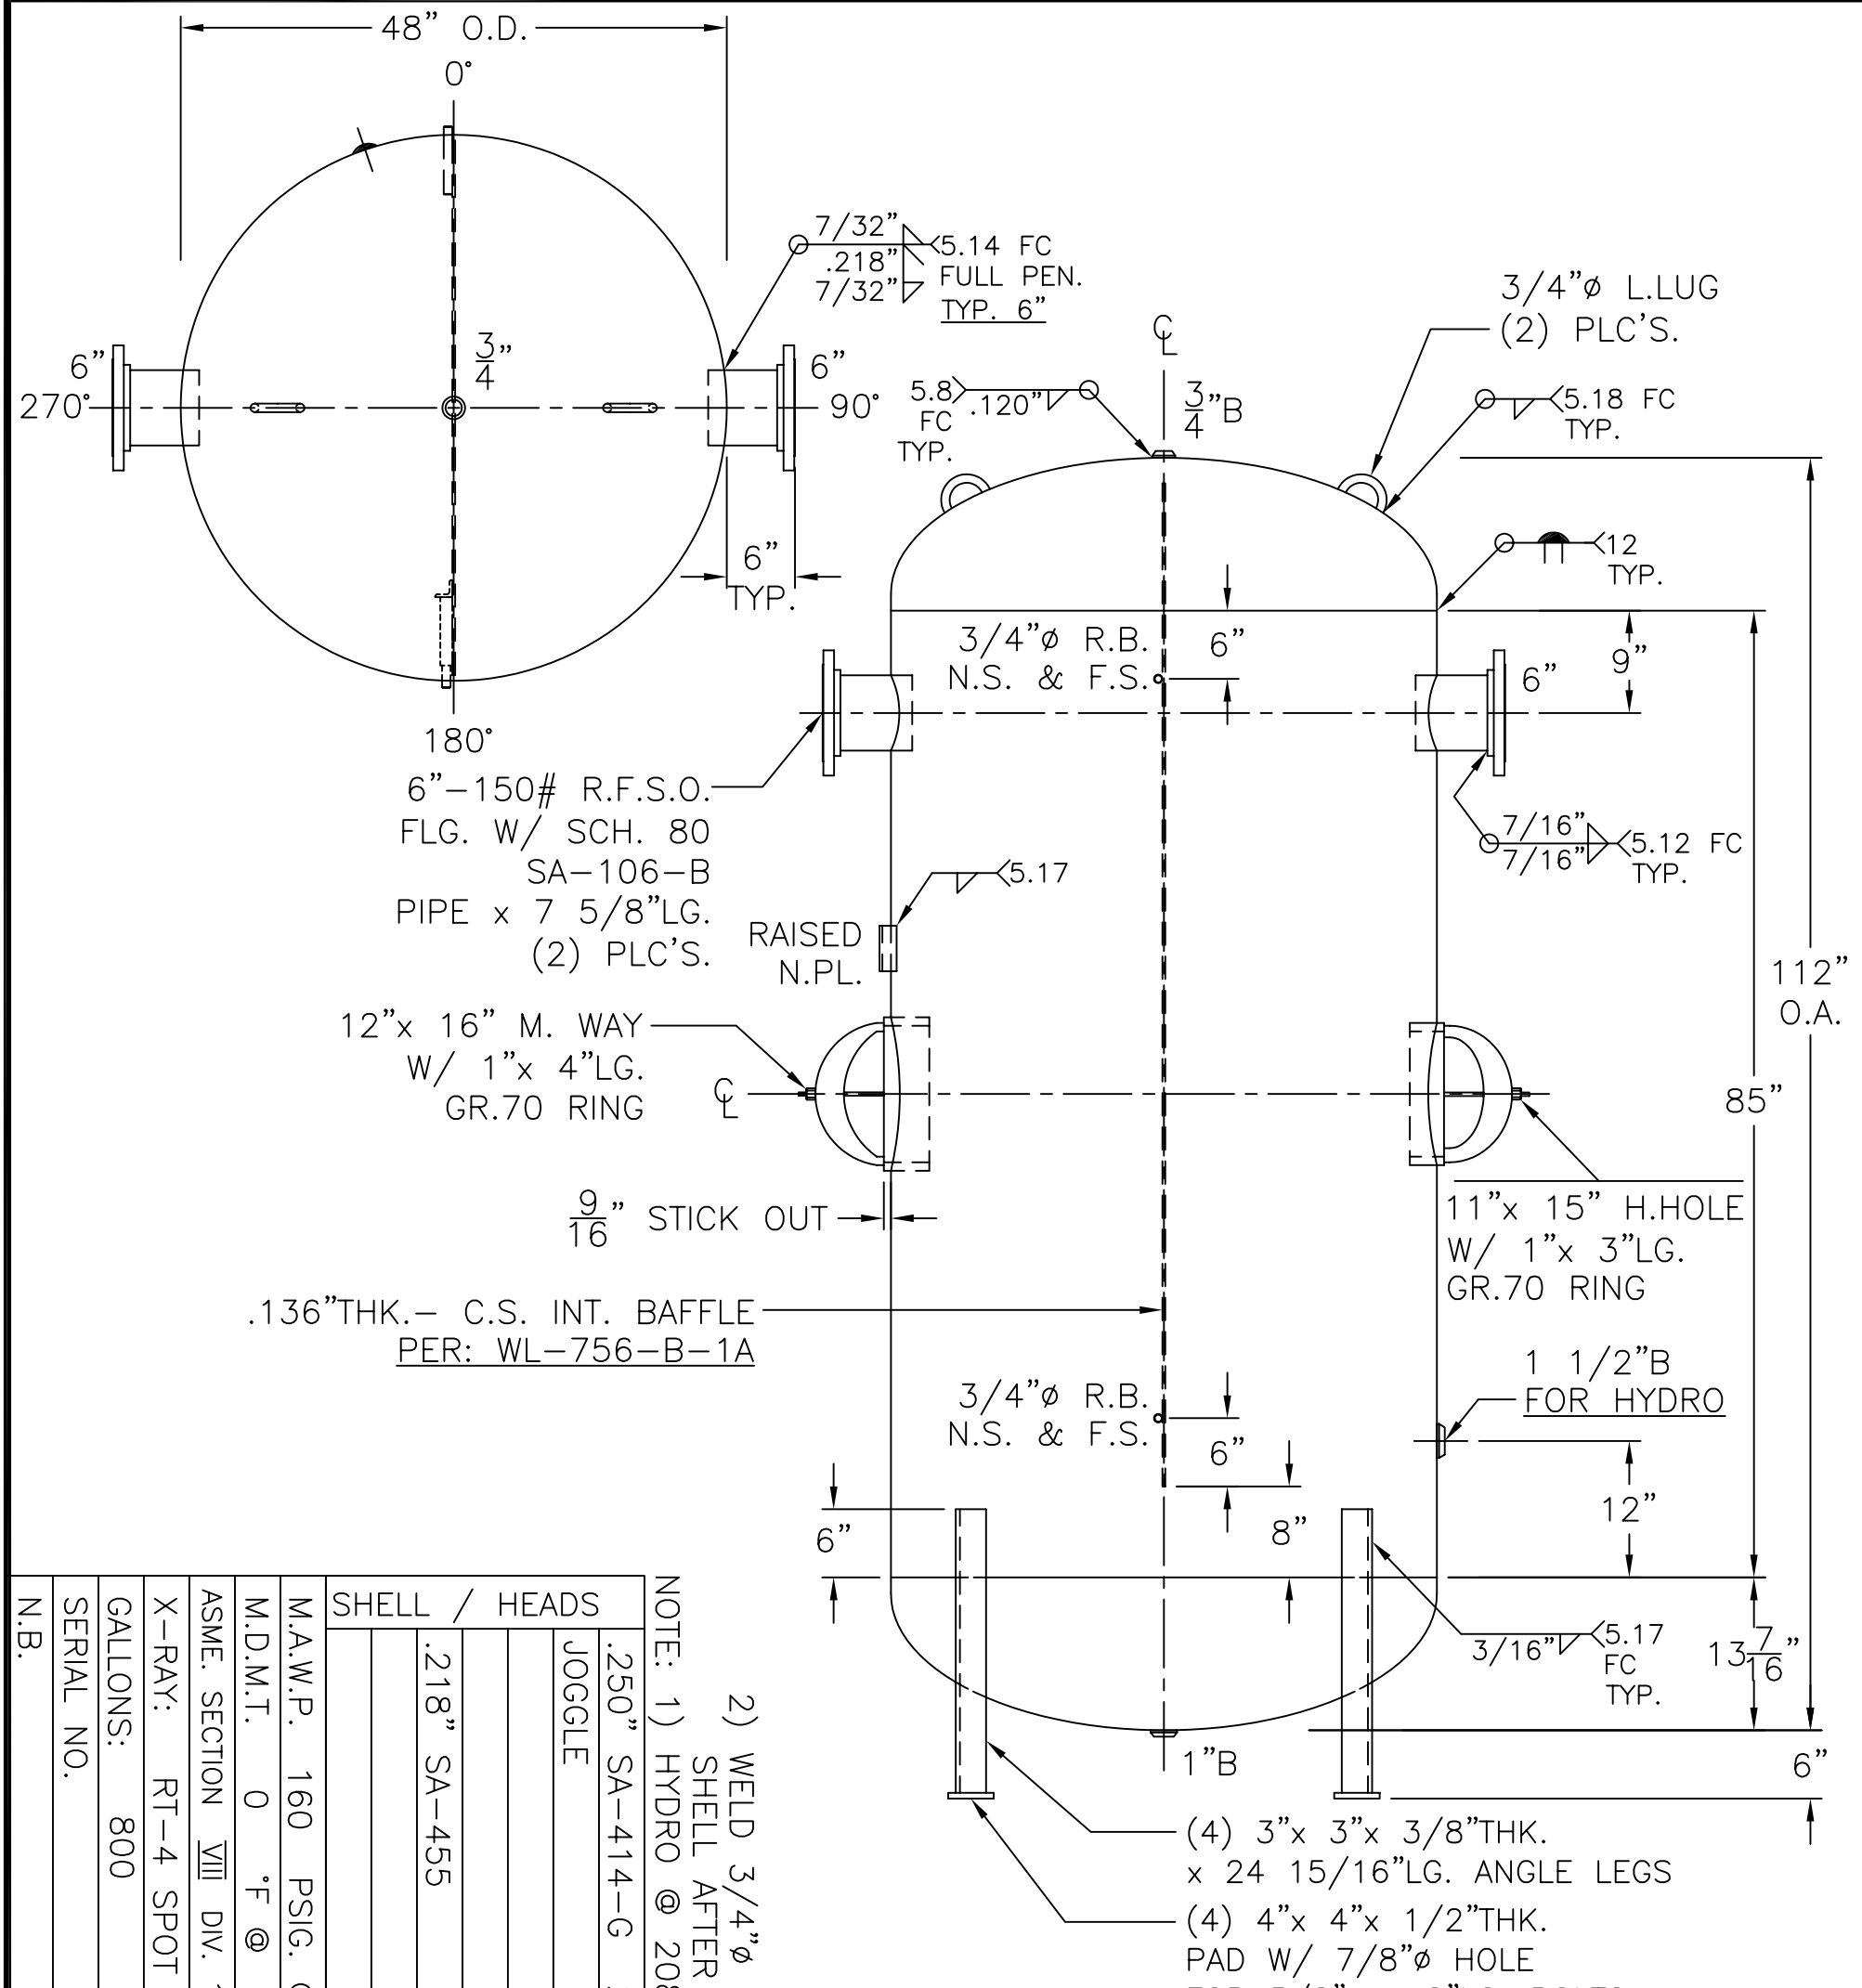

N.B.

SERIAL NO.

GALLONS: 800 WT. 1815 LBS.

ASME. SECTION VIII DIV. 1, 2010 ADD. 2010

X–RAY: RT–4 SPOT L.S. ONLY

M.D.M.T. 0 °F @ 180 °F

M.A.W.P. 160 PSIG. @ 160 PSIG.

SHELL / HEADS
.250" SA–414–G 2:1 S.E.
JOGGLE
.218" SA–455

NOTE: 1) HYDRO @ 208 PSIG. MIN.
2) WELD 3/4"ø ROUND BARS TO SHELL AFTER HEADS ARE IN PLACE.

SURFACE AREA = 125.7 SQ. FT.

UW–21(b)

INSIDE: EPOXY LINED

OUTSIDE: PRIME

LEG–ZONE 4–15 KM.

FOR: HANSON STANDARD

VERT. CHILLED WATER TANK

WL–756–B	REV. 5–12–11
	DATE: 12–11–06
BY: E.S.	SCALE: 3/4"=12"

ROY E. HANSON JR. MFG.
1600 E. WASHINGTON BLVD.
LOS ANGELES, CA 90021